



METHODS OF INSTALLATION OF GUARD RAIL AT LESS THAN FULL SHOULDER WIDTH BRIDGES USING GUARD RAIL TERMINAL (TYPE 2)

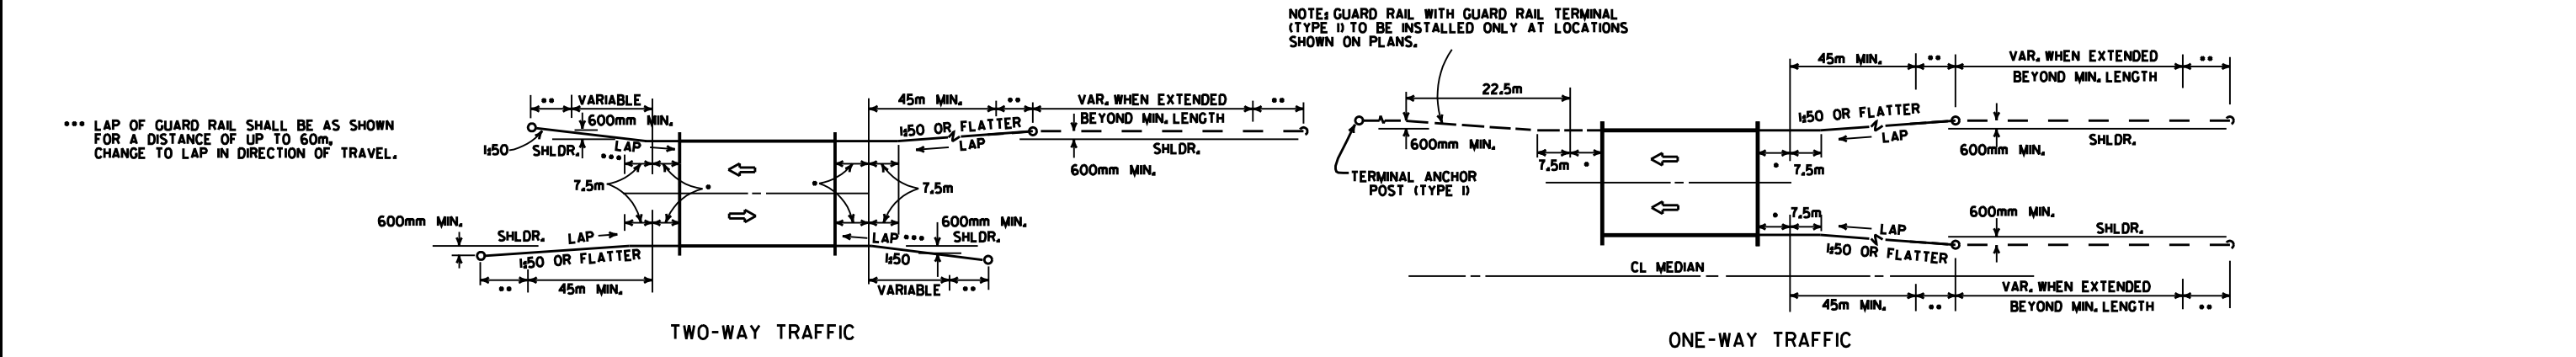

METHOD OF INSTALLATION OF GUARD RAIL AT FULL SHOULDER WIDTH BRIDGES USING GUARD RAIL TERMINAL (TYPE 2)

*** LAP OF GUARD RAIL SHALL BE AS SHOWN FOR A DISTANCE OF UP TO 60m. CHANGE TO LAP IN DIRECTION OF TRAVEL.

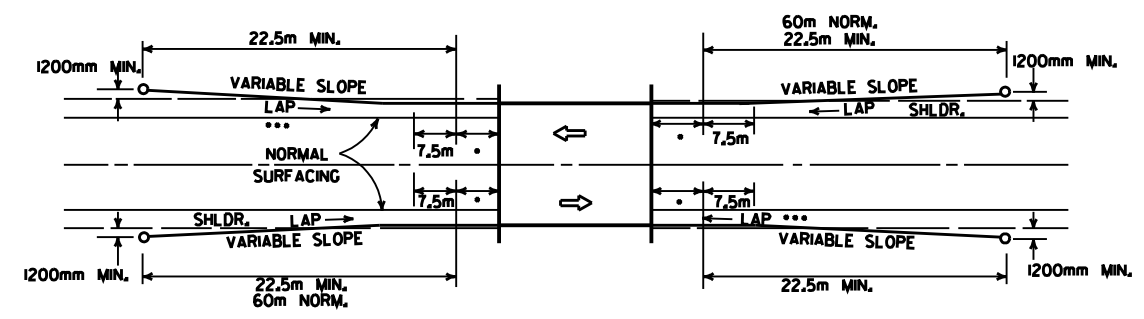

METHOD OF INSTALLATION OF GUARD RAIL USING GUARD RAIL TERMINAL (TYPE 1) (FULL SHOULDER WIDTH OR LESS BRIDGES)

LEGEND

- THREE BEAM GUARD RAIL TERMINAL
- GUARD RAIL TERMINAL (TYPE 2)

ARKANSAS STATE HIGHWAY COMMISSION

GUARD RAIL DETAILS

4-17-08	REVISED LAYOUTS	
1-10-08	REMOVED GUARD RAIL NOTES AND DETAILS	
11-16-04	DELETED NOTE-METHOD OF INSTALLATION OF GUARD RAIL USING GUARD RAIL TERM. (TYPE 1)	
1-2-00	ADDED CONSTRUCTION NOTE	
6-26-97	REVISED LAYOUT	
7-20-95	CONVERTED TO METRIC	
REV.	REVISION	DATE

STANDARD DRAWING GR-9(M)

