



PLAN - GUARD RAIL TERMINAL (TYPE I)

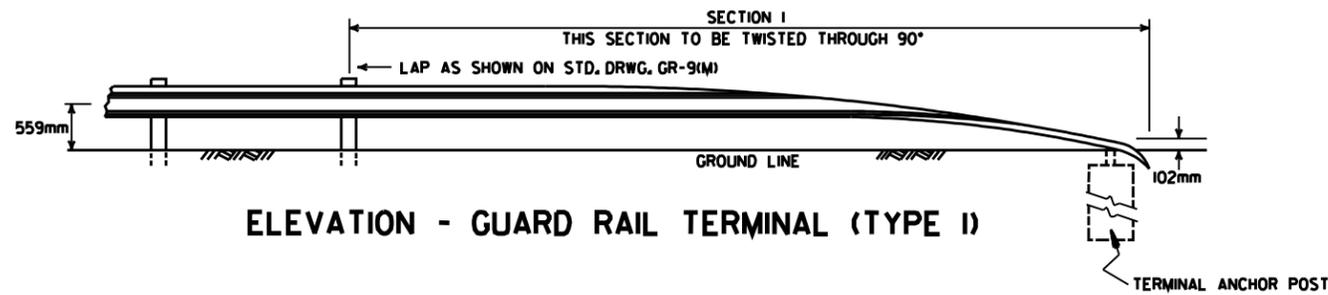


ELEVATION - GUARD RAIL TERMINAL (TYPE I)

NOTE:
SECTIONS 1 AND 2 OF GUARD RAIL TERMINAL SHALL BE PAID FOR AT THE PRICE BID PER METER OF THE TYPE OF GUARD RAIL SPECIFIED.

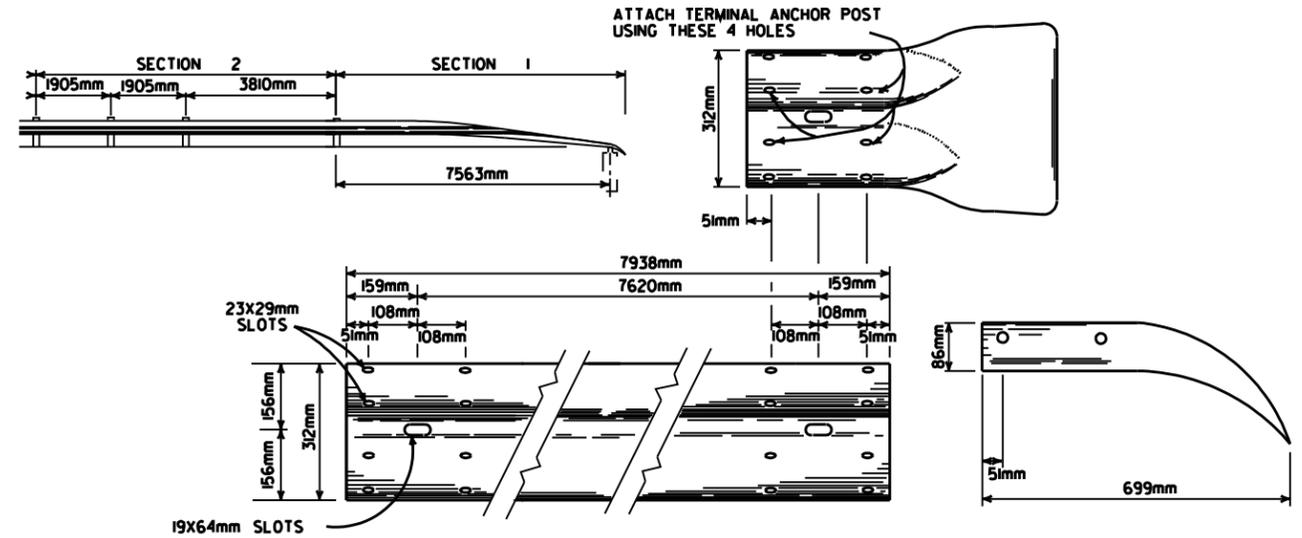

SECTION 1

TERMINAL SECTION

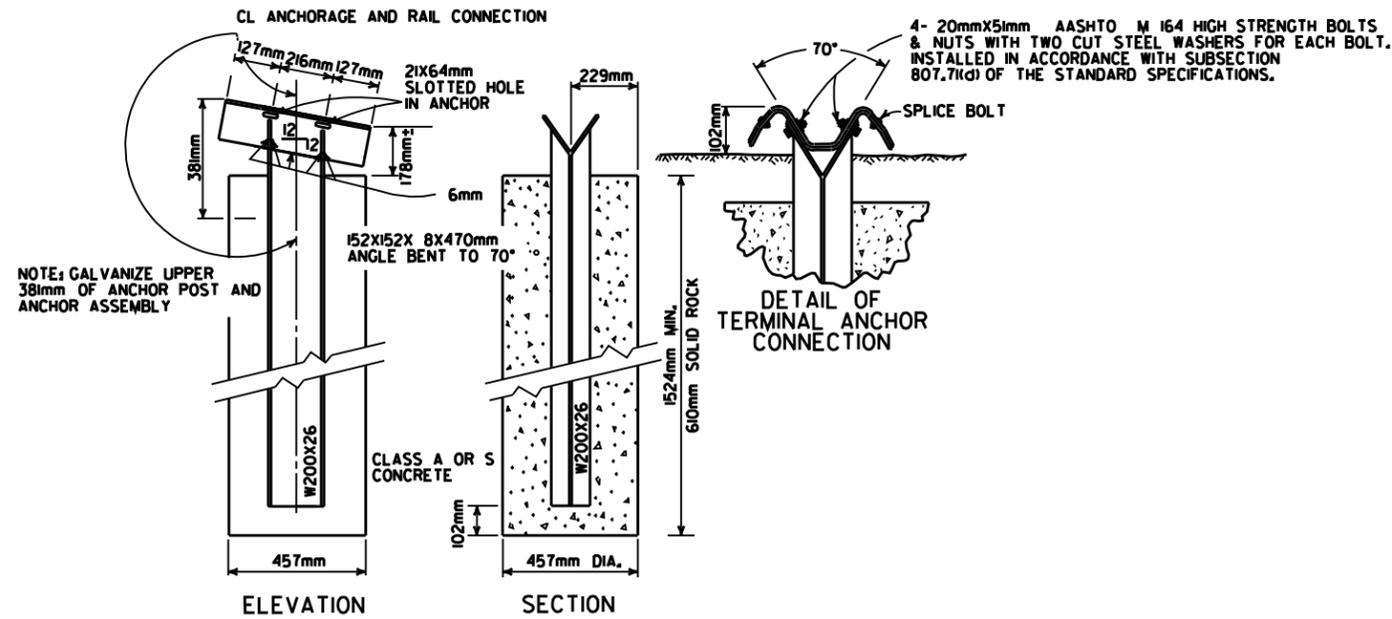

ELEVATION

SECTION

DETAIL OF TERMINAL ANCHOR CONNECTION

NOTE: GALVANIZE UPPER 381mm OF ANCHOR POST AND ANCHOR ASSEMBLY

4- 20mmx51mm AASHTO M 164 HIGH STRENGTH BOLTS & NUTS WITH TWO CUT STEEL WASHERS FOR EACH BOLT. INSTALLED IN ACCORDANCE WITH SUBSECTION 807.71(d) OF THE STANDARD SPECIFICATIONS.

NOTE: RAIL MEMBERS MAY BE BOLTED TO ANGLE AT TERMINAL ANCHOR AND THE TWO ASSEMBLIES POSITIONED TO PROPER ALIGNMENT PRIOR TO PLACING CONCRETE AROUND W200X26 POST IF CONTRACTOR SO DESIRES.

DETAIL OF TERMINAL ANCHOR POST (TYPE I)

ARKANSAS STATE HIGHWAY COMMISSION

GUARD RAIL DETAILS

7-14-10	RAISED HEIGHT OF GUARD RAIL 26mm
6-26-97	REVISED LAP NOTIF
10-18-96	REVISED ASTM REF. TO AASHTO
7-20-95	CONVERTED TO METRIC

STANDARD DRAWING GRT-1(M)

