
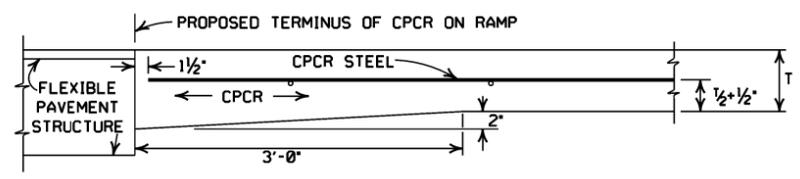


DESIGN SPEED V	Y	NOSE OFFSET C	LENGTH NOSE TAPER Z	RETURN RADIUS R	ADD'L. SURFACING SO. YDS.
40	300.0	8.0	96.0	580.0	602.43
50	320.0	10.0	120.0	725.0	687.29
60	340.0	12.0	168.0	1182.0	790.55
70	360.0	14.0	210.0	1582.0	902.27

NOTE: ON GRADES IN EXCESS OF 4%, THE LENGTHS 'Y' & 'L' MAY BE VARIED TO FIT THE CASE IN THE RATION OF $\frac{1 \pm \% \text{ GRADE}}{2}$ (LENGTH AS SHOWN).

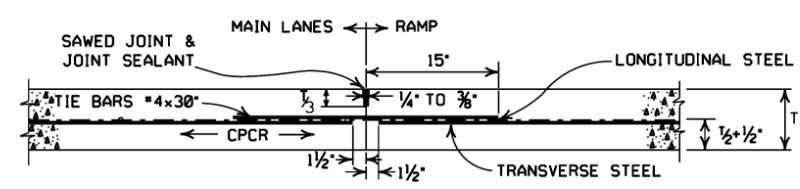

GENERAL NOTES

THE SEQUENCE OF OPERATION ON PLACING THE RAMP SHALL BE AS DIRECTED BY THE ENGINEER. THE LONGITUDINAL STEEL SHALL BE PLACED IN A DIRECTION APPROXIMATELY PARALLEL TO THE DIRECTION OF THE RAMP.

SAWED JOINT AND JOINT SEALANT FOR LONGITUDINAL CONSTRUCTION JOINT SHALL CONFORM TO THE DETAILS SHOWN FOR SAWED LONGITUDINAL JOINT ON STANDARD DRAWING CPTJ-6A.

DATE	REVISION	DATE FILMED
2-27-14	CORRECTED SPELLING	
3-23-89	ALTERED SAWED JOINT & ADDED NOTE	510-3-23-89
11-3-86	DIMEN'S. OF LONG. JTS.	652-11-1-86
10-2-72	REVISED AND REDRAWN	507-10-2-72

ARKANSAS STATE HIGHWAY COMMISSION

DETAILS OF ENTRANCE & EXIT RAMP FOR CONCRETE PAVEMENT CONTINUOUSLY REINFORCED

STANDARD DRAWING CPCR-4