



**DELINEATOR PLACEMENT**




NOTE: DELINEATORS ARE TO BE MOUNTED TO POST USING PIN AND COLLAR (FASTENERS) WHICH ARE 6061 ALUMINUM ALLOY. PIN LENGTH SHOULD NOT EXTEND FURTHER THAN 1/8\"/>

ONLY ONE SPLICE PERMITTED BETWEEN ANCHORS, LOCATED BETWEEN LINE POSTS ONLY. SPLICES WILL NOT BE PERMITTED IN SPANS ADJACENT TO THE ANCHOR AND CABLE END ASSEMBLIES. GUARD CABLE GREATER THAN 300 FEET IN LENGTH REQUIRES AN INTERMEDIATE ANCHOR AS SHOWN.


**SPLICE DETAIL**

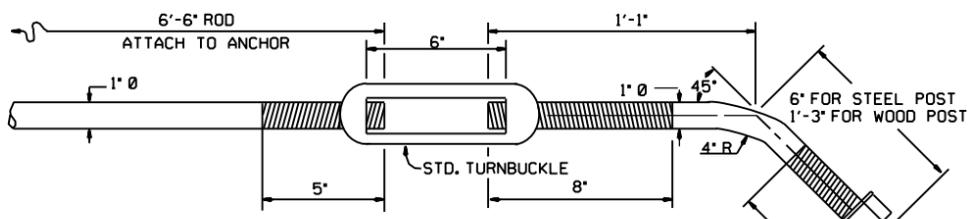

**ANCHOR ROD ASSEMBLY**

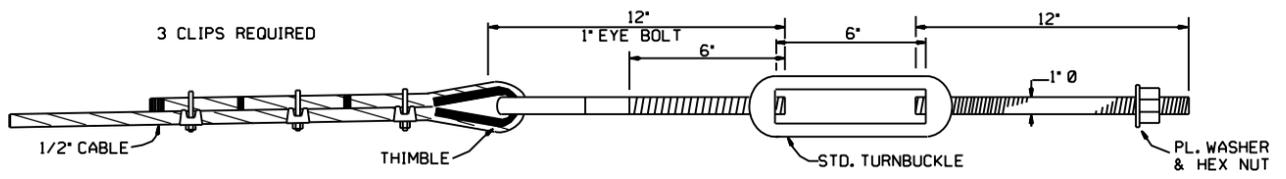

**CABLE END**

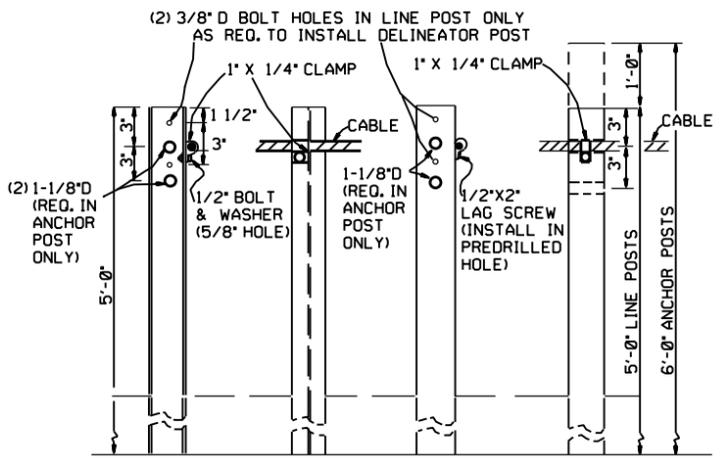

**STEEL POST**  
S 3 X 5.7 OR WELDED BEAM CONSTRUCTION (ASTM A769)

**WOOD POST**  
3 1/2\"/>

**POST DETAILS**

NOTE: POST MAY BE WOOD OR STEEL. IN GENERAL, ONLY ONE MATERIAL WILL BE ALLOWED WITHIN A SINGLE PROJECT. HOWEVER, WITH APPROVAL OF THE ENGINEER, POSTS MAY BE MIXED ON A JOB PROVIDED DEFINITE LIMITS ARE ESTABLISHED AND ALL POSTS ARE OF THE SAME TYPE WITHIN THOSE LIMITS. ONLY ONE TYPE POST MAY BE USED WITHIN A SINGLE ASSEMBLY.

DATE	REVISION	FILMED
10-18-96	REV. ASTM REF. TO AASHTO & CHANGED WOOD POST NOTE	
11-30-89	RELABEL & LENGTHENED ANCHOR POST	11-30-89
3-23-89	LABELLED POSTS	514-3-23-89
1-9-87	ISSUED	535-1-9-87

ARKANSAS STATE HIGHWAY COMMISSION

GUARD CABLE

STANDARD DRAWING GC-1